



**WITH LAMINAR FLOW IN BASE OF SPOUT TWO-HANDLE
CENTERSET LAVATORY FAUCET WITH RIGID/SWIVEL GOOSENECK SPOUT**

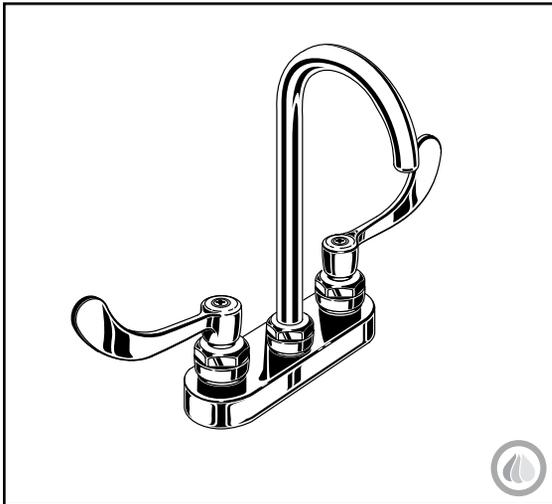

7500.180 Shown

MODEL NUMBER:*

- 7500.180 Centerset Lavatory**
 1.5 gpm Pressure Compensating Laminar Flow device in base of spout. Field-Convertible rigid/swivel gooseneck spout. Plain spout end. Vandal-Resistant Wrist Blade handles. Less drain and pop-up hole.

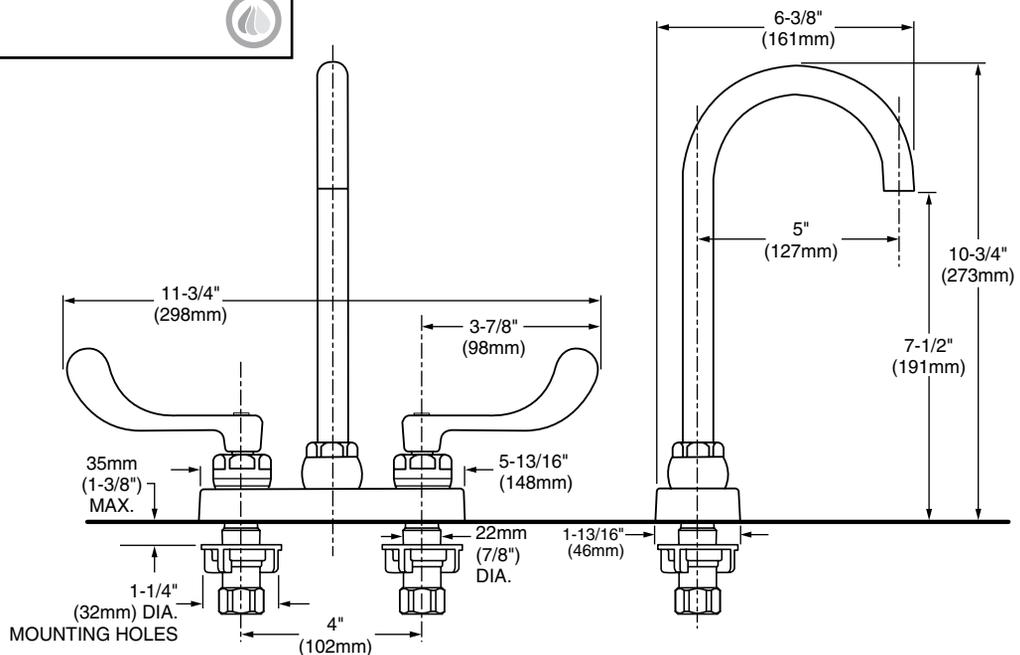

GENERAL DESCRIPTION:

Durable cast brass construction. 1/2" male threaded inlet shanks with brass shank nuts and coupling nuts. 1/4 turn ceramic disc valve cartridges. Field-Convertible rigid/swivel spout. Plain spout end. Vandal-Resistant Wrist Blade with blue & red color indexes. 1.5 gpm/5.7L/min. maximum flow rate.

PRODUCT FEATURES:

- Laminar Flow Device in Base of Spout:** Ideal for hospital applications.
- Solid Brass Construction:** Durable - Excellent in high use applications. Ideal for prolonged contact with water.
- Ceramic Disc Valve Cartridge:** Assures a lifetime of drip-free performance.
- Field-Convertible Rigid/Swivel Spout:** Easily converted in the field.
- Low Lead:** Faucet contains 0.25% total lead content by weighted average.

SUGGESTED SPECIFICATION:


4" center-set lavatory faucet shall be cast brass construction with all brass shank nuts and coupling nuts. Shall feature water-conserving 1.5 gpm/5.7L/min. pressure compensating laminar flow device in base of spout. Vandal-Resistant wrist blade handles. 1/4 turn washerless ceramic disc valve cartridges. Shall also feature field-convertible rigid/swivel spout with plain spout end. Fitting shall be American Standard Model # 7500.180.002.

**LAMINAR FLOW IN BASE OF SPOUT TWO-HANDLE
CENTERSET LAVATORY FAUCET WITH GOOSENECK SPOUT**

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

- ANSI 117.1**
- ASME A112.18.1**
- CSA B 125**
- NSF 61/Section 9 and Annex G**

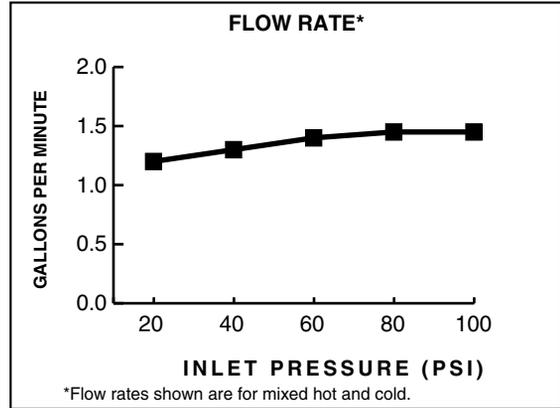

Product Number	Description	Finish
		Polished Chrome
7500.180	Centerset Lavatory with field-convertible rigid/swivel gooseneck spout. 1.5 gpm/5.7L/min pressure compensating laminar flow device in base of spout. Plain spout end. Vandal-Resistant Wrist Blade Handles. Less drain and pop-up hole.	002

 MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES