



**Short
Floor-to-Vent
Heights**

**Small Jacket
Diameters**

**Greater
Installation
Flexibility**



Available in 48, 60, 63, 75, 98 and 100 Gallon Tank-Type Models

▶ 45,000 BTU/Hr. thru 80,000 BTU/Hr.

Rheem-Ruud gas commercial water heaters are specifically designed to fill the need wherever medium quantities of hot water are required. Typical applications include small restaurants, apartments and small office buildings.

Construction Features:

- **Space saving design** – short heights and small jacket diameters result in greater installation flexibility.
- **Long life tank design** – proprietary steel formulation with a unique coat of high temperature porcelain enamel to maximize corrosion resistance resulting in a superior tank design. Magnesium anode rods are installed for longer tank life.
- **Foam insulation** – rigid foam insulation provides superior insulating qualities, improves efficiency and reduces operating costs. Our patented process of injecting foam into the insulating cavity adds additional durability.
- **Automatic controls** – control system is designed to shut off gas if the pilot flame is extinguished. Relighting is a safe, easy procedure. Thermostat settings to 160°F. A built-in gas pressure regulator assures even gas flow.
- **Temperature and pressure relief valve** – AGA/ASME rated and factory installed.
- **Brass drain valve**

Certifications and Ratings:

- **Efficiency** – these models have been tested according to DOE test procedures, and meet or exceed the thermal efficiency and standby loss requirements of current ASHRAE standards (Part of the Federally mandated Energy Policy Act (EPact)). Also exceeds energy efficiency codes of all states including California Energy Commission (CEC).
- **Safety and construction** – these products are design certified by CSA Laboratories: a) For operation at 160°F. b) To meet all safety and construction requirements of ANSI Z21.10.1/ANSI Z21.10.3. c) As an automatic storage water heater. d) For operation of combustible floors and alcove installations. e) For combination water heating and space heating applications. All models are North Carolina and Massachusetts Code compliant. Certified for a 150 PSI Maximum Working Pressure.

RECOVERY CAPACITIES Recovery in U.S. Gallons/Hr. (GPH) at various temperature rises											
MODEL NUMBER	INPUT (BTU/HR.)	40°F	50°F	60°F	70°F	80°F	90°F	100°F	110°F	120°F	130°F
G60-50N†	50,000	115	92	77	66	58	51	46	42	38	35
G60-50LP*	45,000	104	83	69	59	52	46	41	38	35	32
G50-65N†	65,000	150	120	100	86	75	67	60	54	50	46
G50-65LP*	48,000	111	88	74	63	55	49	44	40	37	34
G65-65N	65,000	150	120	100	86	75	67	60	54	50	46
G65-65LP	50,000	115	92	77	66	58	51	46	42	38	35
G75-75N-2†	75,100	182	146	121	104	91	91	73	66	61	56
G75-75LP*	65,000	150	120	100	86	75	67	60	54	50	46
G100-80	80,000	194	155	129	111	97	86	78	71	65	60
G100-80N†	76,000	184	147	123	105	92	82	74	67	61	57
G100-65LP*	65,000	150	120	100	86	75	67	60	54	50	46

Recovery rating is based on recovery efficiencies obtained in a CSA certified laboratory.

MAXIMUM DELIVERY Delivery in U.S. Gallons. (Includes useable storage and recovery for indicated times)														
MODEL NUMBER	GALLON CAPACITY	INPUT (BTU/HR.)	TEMP. RISE	UNITS	5 Min.	10 Min.	15 Min.	20 Min.	30 Min.	45 Min.	60 Min.	120 Min.	180 Min.	Min. to Rec. Contents
G60-50N	60	50,000	100 °F	GAL	46	50	54	57	65	77	88	134	180	78
G60-50LP	60	45,000	100 °F	GAL	45	49	52	56	63	73	84	125	166	87
G50-65N	48	65,000	100 °F	GAL	39	44	49	54	64	79	94	153	213	48
G50-65LP	48	48,000	100 °F	GAL	37	41	45	48	56	67	78	122	166	65
G65-65N	63	65,000	100 °F	GAL	49	54	59	64	74	89	104	164	224	63
G65-65LP	63	50,000	100 °F	GAL	48	52	56	60	67	79	90	136	182	82
G75-75N-2	75	75,100	100 °F	GAL	59	65	71	77	89	107	125	198	271	62
G75-75LP	75	65,000	100 °F	GAL	56	63	68	73	82	97	112	172	232	75
G100-80	100	80,000	100 °F	GAL	77	83	89	96	109	128	148	225	303	77
G100-80N	100	76,000	100 °F	GAL	76	82	88	95	107	125	144	217	291	81
G100-65LP	98	65,000	100 °F	GAL	74	79	84	89	99	114	129	189	248	98

DIMENSIONAL INFORMATION												
MODEL NUMBER	UNITS	A	B	C	D	E	F	G	CLEARANCE TO COMBUSTIBLES			APPROX. SHIPPING WEIGHT
									SIDE	FRONT	TOP	
G60-50	inches	62	58	23	13-1/4	4	8	48-1/2	1	3	2	180 lbs
G50-65	inches	62-1/2	58-1/2	21-3/4	14	4	11	51-3/4	0	3	12	180 lbs
G65-65	inches	65	61-1/4	23	14	4	11	54-3/4	0	3	12	225 lbs.
G75-75	inches	64	60	26-1/4	13-1/4	4	11	53-1/4	1	3	2	320 lbs.
G100-80	inches	69-5/8	65-3/4	28-1/4	11	4	15	57-13/16	1	Alcove	12	410 lbs.
G100-65	inches	67-3/4	64	27-1/4	14-3/8	4	11	57-3/16	1	3	12	350 lbs.

† Meets 40ng/J NOx requirements.


* FVIR Compliant

Recommended Specifications:

Water heater(s) shall be model _____, manufactured by RHEEM-RUUD, having gas input of _____ Btu/hr. and a recovery rate of _____ GPH at a 100°F temperature rise. Water heater(s) shall have a storage capacity of _____ gallons. Water heater(s) shall have the CSA seal of certification and be factory equipped with an AGA/ASME rated temperature and pressure relief valve. Tank(s) shall have a coating of high temperature porcelain enamel and furnished with a magnesium anode rod rigidly supported and a brass drain valve. Water heater(s) shall meet or exceed the energy factor requirements of ASHRAE. Tanks shall have a working pressure rating of 150 psi, and shall be completely factory assembled, including a pressure regulator properly adjusted for operation on _____ gas. Controls will be arranged for safety shutoff in event of pilot failure. Complete unit shall be insulated with rigid polyurethane foam insulation. Water heater(s) shall be covered by a three year limited warranty against tank leaks.

Limited Warranty:


This product features a three year limited warranty against tank leaks. Please refer to Commercial Warranty Certificate for complete information.

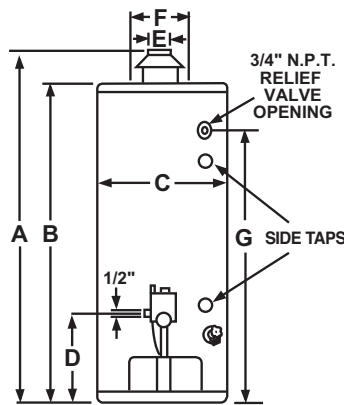

G50-65, G60-50, G65-65, G75-75 & G100-65
SIDE TAPS ON 48, 63, 75 & 98 GAL. MODELS ONLY

G50-65, G60-50 & G65-65 WATER CONNECTIONS ARE 3/4" NPT

G75-75 & G100-65LP WATER CONNECTIONS ARE 1" NPT

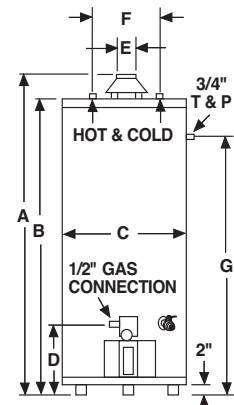

G100-80
WATER CONNECTIONS ARE 1" NPT



COMMERCIAL WATER HEATERS

In keeping with its policy of continuous progress and product improvement, Rheem-Ruud reserves the right to make changes without notice.

Rheem Water Heating • 101 Bell Road, Montgomery, Alabama 36117-4305 • www.rheem.com

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1, Brampton, Ontario L6Y 0P5